


HP006


Coupler

Part Number	Connection Type	A Overall Length	H Hex Size	Maximum Working Pressure
#				
		inch	inch	psi
HP006-0-A9	Type "M" (9/16" - 18 threads)	3.30	1.19	30,000
HP006-0-A12	Type "M" (3/4" - 16 threads)	3.34	1.19	30,000
HP006-0-HM4	1/4" High Pressure Male	3.46	1.19	30,000
HP006-0-HM9	9/16" High Pressure Male	3.70	1.19	30,000
HP006-0-LM6	3/8" Medium Pressure Male	3.54	1.19	20,000
HP006-0-NFB	1/4" NPT Female	3.30	1.19	15,000
HP006-0-NFC	3/8" NPT Female	3.30	1.19	15,000
HP006-0-NMB	1/4" NPT Male	3.40	1.19	15,000
HP006-0-NMC	3/8" NPT Male	3.30	1.19 </td <td>15,000</td>	15,000
HP006-0-NMD	1/2" NPT Male	3.45	1.19	15,000
HP006-0-X13	Low Angle Face Seal (9/16" - 18 threads)	3.37	1.19	30,000


D

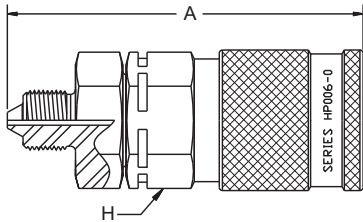


HP006-0-HM4

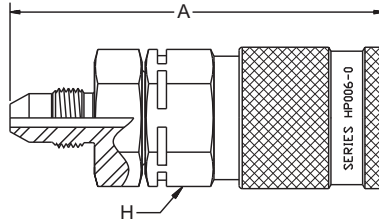


HP006-0-LM6

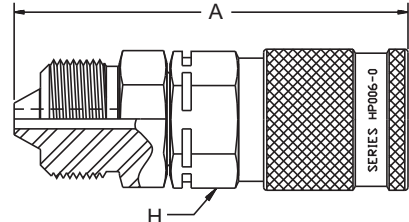


HP006-0-HM9




**HP006-0-A9,
 HP006-0-A12**

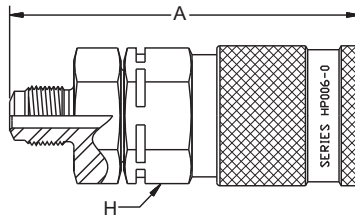

HP006-0-X13

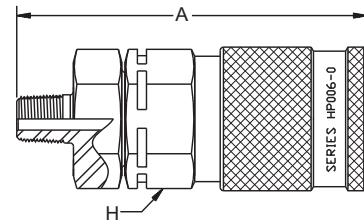

**HP006-0-NMB,
 HP006-0-NMC,
 HP006-0-NMD**

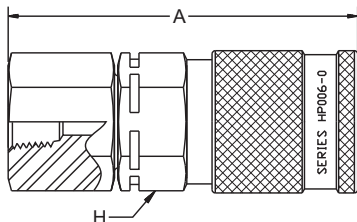

**HP006-0-NFB,
 HP006-0-NFC**